

CMI
ROADBUILDING INC.



ASPHALT PLANT ANCILLARY

SE 60

**SELF ERECTING
HOT MIX STORAGE SILO**




WWW.CMI-ROADBUILDING.COM

SE 60 SELF ERECTING HOT MIX STORAGE SILO



The CMI SE 60 self erecting hot mix storage silo offers truly portable storage capacity. With integrated compressor, heated discharge gates and a dual chain drag slat with various drive options, the SE 60 can be used with plants with up to 200 tph output.

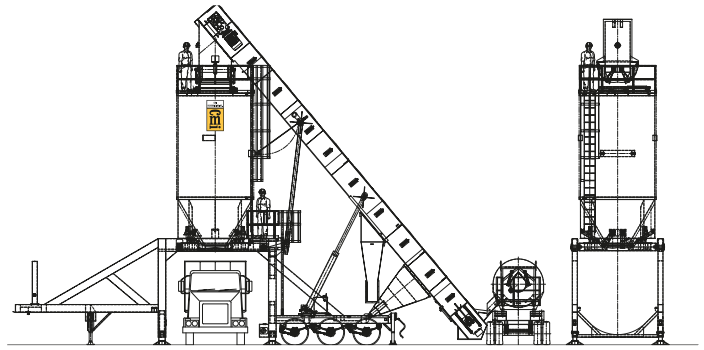

SE 60 SPECIFICATIONS

DRAG SLAT CONVEYOR

CAPACITY	200 tph
	181 mtph
DRIVE MOTOR	40 hp
	30 kW

MIXED MATERIAL STORAGE SILO

NO. OF SILO'S	1
STORAGE CAPACITY	60 t*
	55 mt*
AIR COMPRESSOR	15 hp
	11 kW
WORKING POSITION HEIGHT CLEARANCE	13 ft
	3.96 m

SELF ERECTION SYSTEM

HYDRAULIC FLUID RESERVOIR	17 gal
	68 l
HYDRAULIC DRIVE MOTOR	2 hp
	1.5 kW

TRANSPORT DIMENSIONS

LENGTH	56' 8"
	17260 mm
WIDTH	11' 10"
	3610 mm
HEIGHT	14' 6"
	4420 mm
WEIGHT	66138 lb
	30,000 kg

*Storage capacity based on a density of 120lb/cu ft (1922 kg/m³)

FEATURES & BENEFITS

- Fully mobile road towable unit
- Fast on-site setup, no crane required
- Unique onboard hydraulic self erection system

Cedarapids®



All reasonable steps have been taken to ensure the accuracy of this publication. However, due to our policy of continual product development, CMI Roadbuilding Inc. reserve the right to change details without prior notice. All machines supplied in accordance with our standard conditions. Illustrations and photos may show optional equipment. Standard Havens is a registered trademark of CMI Roadbuilding Limited in the United Kingdom, the European Union and Australia. All rights reserved. Copyright © CMI Roadbuilding Inc. 2023.